

DNS



- [] [] route [] [] [] []

A

- IPv4
- from example.com to 0.0.0.0

AAAA


- IPv6
- from example.com to ...


CNAME

- from domain to domain



- [] [] [] [] DNS [] [] [] []



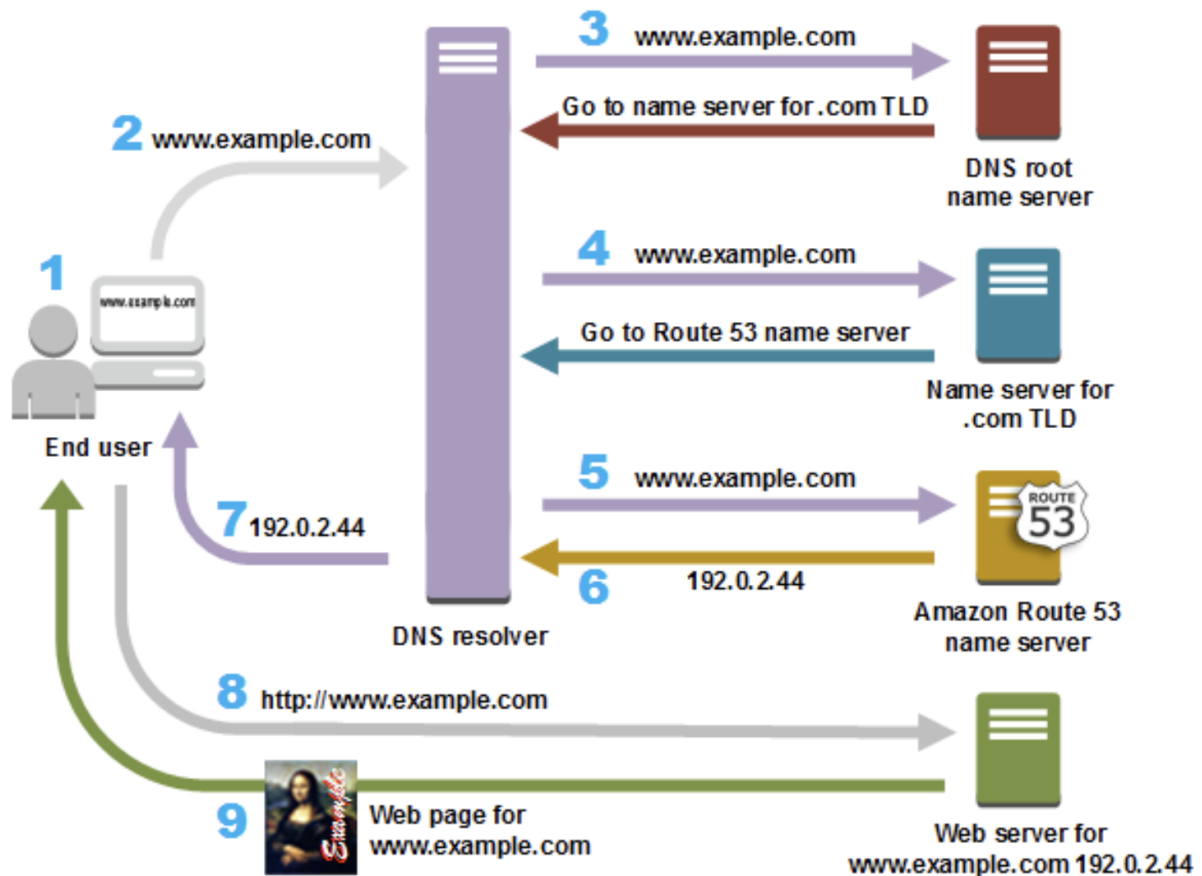

<https://aws.amazon.com/route53/what-is-dns/#:~:text=The%20Internet's%20DNS%20system%20works,These%20requests%20are%20called%20queries.>

```
# mac[] resolver [] [] []
```

```
scutil --dns
```

```
resolver #1
  search domain[0] : openvpn
  nameserver[0] : 210.220.1.1
  nameserver[1] : 219.250.1.1
  nameserver[2] : 8.8.8.8
  flags   : Request A records
  reach   : 0x00000002 (Reachable)
```

```
(...)
```

- resolver [] [] [] []

- Q) resolver `nameserver` `resolver`?
 - `nameserver[0], [1], [2]` `resolver`
-



- [AWS LightSail DNS](#)
-

Revision #5

Created 17 July 2024 14:40:20 by Yeonwoo Kim

Updated 17 July 2024 23:49:47 by Yeonwoo Kim